

# Deployit Admin Help

Version 3.7.4

Table of Contents

The Admin Screen

Global permissions

Roles

2

3

3


3

## The Admin Screen

The Admin Screen is used to maintain security roles and global permissions in Deployit. For more information about Deployit security, see the **Reference Manual** and **System Administration Manual**.

### Global permissions

The global permissions tab is used to assign global permissions to roles. The following screenshot shows an example of the global permissions tab:

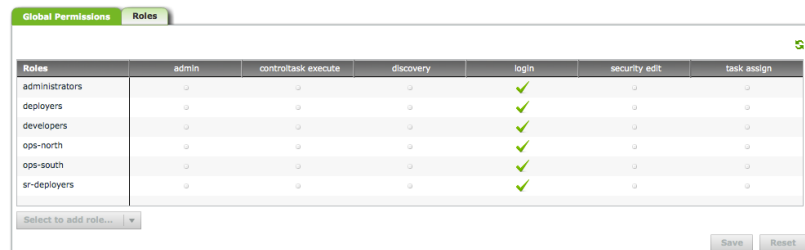

Roles	admin	controltask execute	discovery	login	security edit	task assign
administrators	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	✓	<input type="checkbox"/>	<input type="checkbox"/>
deployers	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	✓	<input type="checkbox"/>	<input type="checkbox"/>
developers	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	✓	<input type="checkbox"/>	<input type="checkbox"/>
ops-north	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	✓	<input type="checkbox"/>	<input type="checkbox"/>
ops-south	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	✓	<input type="checkbox"/>	<input type="checkbox"/>
sr-deployers	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	✓	<input type="checkbox"/>	<input type="checkbox"/>

Select to add role... Save Reset

The table displays, for each role, which global permissions are assigned to it. If a permission is assigned to the role, a check mark is shown. If the permission is not assigned, a dot is shown.

To add a role and assign permissions to it, select it from the dropdown list in the bottom-left corner of the table. Click on a dot or check mark to assign or unassign the permission to the role.


Note that changes made to the global permissions table are not stored until you press the **Save button**.

The screen contains the following buttons:

- **Save button:** This button is used to save the changes you have made to the table.
- **Reset button:** This button cancels all changes to the table and reloads the table and roles from the server.
- **Refresh button:** This button cancels all changes to the table and reloads the table and roles from the server.

### Roles

The roles tab is used to create and maintain roles in Deployit. The following screenshot shows an example of the roles tab:

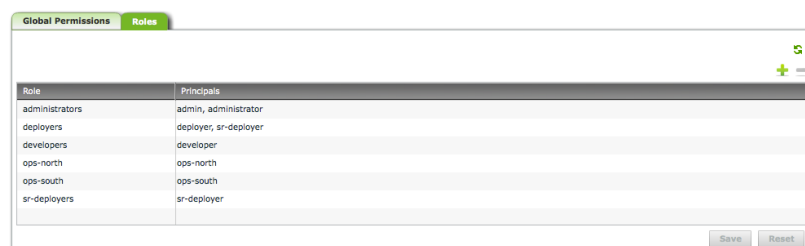

Role	Principals
administrators	admin, administrator
deployers	deployer, sr-deployer
developers	developer
ops-north	ops-north
ops-south	ops-south
sr-deployers	sr-deployer

+ - Save Reset

The table displays, for each role, which *principals* are a member of the role.

To create a role, click the **plus** sign on the top-right corner of the table. A new role is added to the table. Enter a role name and press the **Tab** key to move to the principals field. Enter all principals that are a member of the role, separated by *commas*.

To remove a role, select it in the table and press the **minus** sign on the top-right corner of the table.

To rename a role, double-click on the role name, type the new role name and press the **Save button**.

To edit a role, double-click the principal list, edit the list and press the **Save button**.

Note that changes made to the role table are not stored until you press the **Save button**.

The screen contains the following buttons:

- **Save button:** This button is used to save the changes you have made to the table.
- **Reset button:** This button cancels all changes to the table and reloads the table and roles from the server.
- **Refresh button:** This button cancels all changes to the table and reloads the table and roles from the server.